

Super High Energy Series

Nickel-Metal Hydride

VH F 16000 XP



The VH F 16000 XP cell is especially designed to meet any application where power and long autonomy are required, such as personal electric vehicles, and professional appliances. The suffix "XP" stands for eXtended Power and illustrates the higher power capability of the VH F 16000 XP

To meet customers' requirements, Saft provides custom-designed and standardized battery packs and electronic monitoring systems.

For your battery design and system needs, please contact Saft's engineers.

Applications

- Electric bicycles scooters and wheelchairs
- Professional lighting
- Audio equipments
- Vacuum cleaners

Main advantages

- Super high capacity
- Fast charge ability
- Good storage ability
- Excellent cycling performance

Technology

- Foam positive electrode
- Metal-hydride negative electrode

Temperature range in discharge

- 10°C to + 40°C

Storage

Recommended: + 5°C to + 25°C
Relative humidity: 65 ± 5 %

Electrical characteristics

Nominal voltage (V)	1.2
Typical capacity (mAh)*	16000
IEC minimum capacity (mAh)*	15000
IEC designation	HRH 33/91
Impedance at 1000 Hz (mΩ)	2.5

* Charge 16 h at C/10, discharge at C/5.

Dimensions

Diameter (mm)	32.15 ± 0.10
Height (mm)	88.8 ± 0.4
Top projection (mm)	1.4 ± 0.4
Top flat area diameter (mm)	5.6
Weight (g)	265

Dimensions are given for bare cells.

Charge conditions

Rate	Time (h)	Temp. (°C)	Charge current (mA)
Fast	3-4	0 to + 35	up to 5000
Standard	16	0 to + 40	1500
Trickle*	(after a topping)		300 to 400
Topping	(after a main charge)		500 to 1500

End of charge cut-off is requested: dT°C/dt recommended.

* Trickle charge follows fast charge.

Maximum discharge current

Continuous (A) at + 20°C	50
Peak (A) at + 20°C*	180

* Peak duration: 0.3 second - final discharge voltage 0.6 volt./cell.




saft


Typical performances

For graphs shown, C is the IEC₅ capacity.


Dimensions in mm.

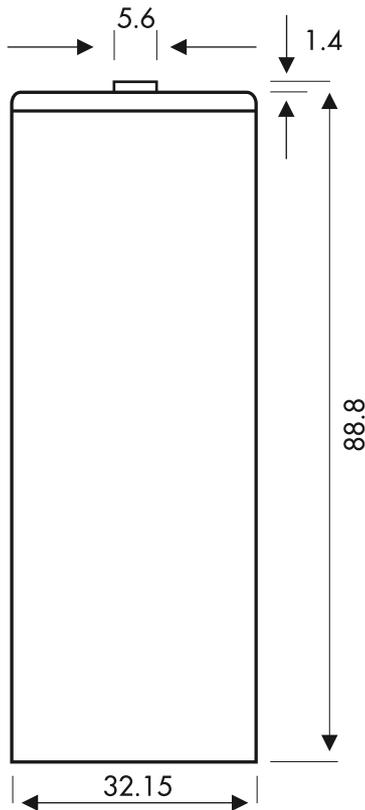


Voltage and temperature at 5A charge

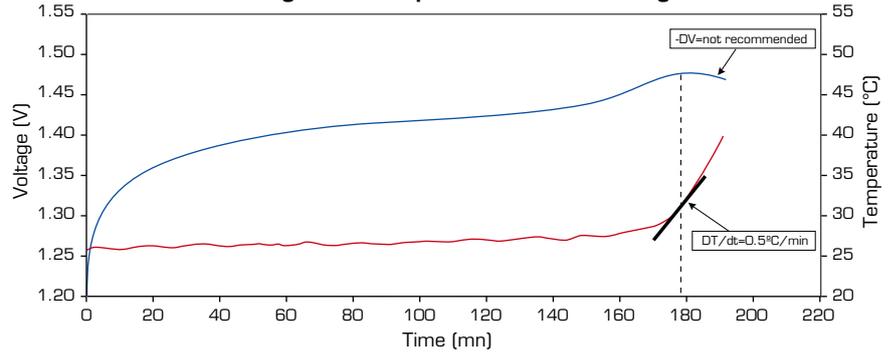

Discharge curves at room temperature after a charge at 5 A

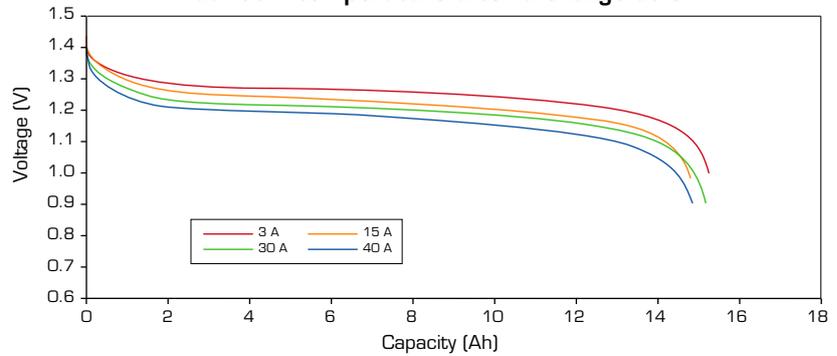

30A discharge curves at room temperature after a charge at 5 A

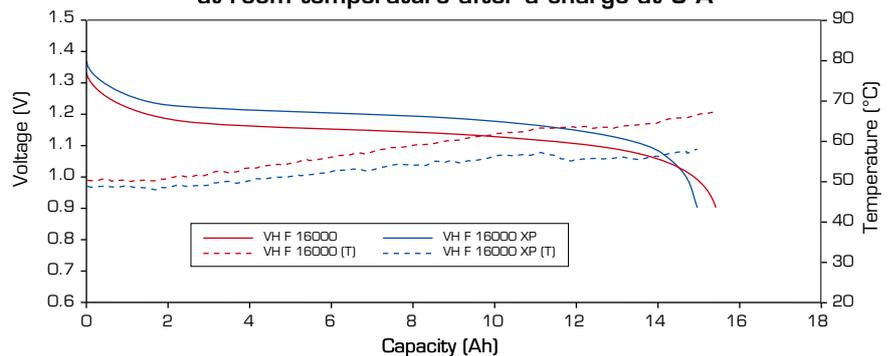

Data are given for single cells. Please consult Saft for any use of this cell in other conditions than those given in this data sheet.

Saft
Rechargeable Battery Systems
 12, rue Sadi Carnot
 93170 Bagnolet - France
 Tel.: +33 (0)1 49 93 19 18
 Fax: +33 (0)1 49 93 19 68
 Email: rbs.info@saftbatteries.com

www.saftbatteries.com

DOC N°11121-2-0109
 Data in this document are subject to change without notice and become contractual only after written confirmation by Saft.
 Photo credits: Saft
 Published by the Communication Department
 Saft S.A. Stock capital 31.944.000 €
 RCS Bobigny B 383 703 873
 Designed by Soyouzgraphic

