

Lithium-ion Rechargeable Battery Pack

Specification

Product Name: LiFePO4 Li-ion Battery Pack

Product Specification: 48V12.8Ah (26650)

Designed	Checked	Approved
<u>Liping Zhu</u>	<u>PengRen</u>	<u>Shijie Ren</u>

Directory

1. Preface	3
2. Product and Model	3
3. Battery Pack Specifications	4
4. PCM Electrical Characteristics	5
5. Appearance And Delivery Condition	6
6. Standard Test Conditions	6
7. Characteristics	7
8. Characteristic curve	8
9. Cautions	8
10. Warranty & Product Liability	9

1. Preface

This specification describes the type and size, performance, technical characteristics, warning and caution of the HETER-48V/12.8Ah LiFePO₄ rechargeable pack. The specification only applies to HETER-48V/12.8Ah LiFePO₄ pack supplied by HETER ELECTRONICS GROUP CO.,LTD.

2. Product and Model

2.1 Product: Lithium-ion Battery Pack

2.2 Model: HT-48V12.8Ah-16S4P-26650

2.3 Picture And Output Wire



3. Battery Pack Specifications

Items	Standard	Comments
Nominal voltage	48V	
Typical capacity	12.8Ah	At 0.3C discharge rate
Minimum capacity	12.0Ah	
Size (L*W*H)	455*100*75mm	
Weight	5.7±0.2Kg	
Max continuous discharge current	15A	
Over current protection	55±5A	10±5ms
Discharge cut-off voltage	40.0V	
Charge voltage	58.4±0.1V	Charge mode: CC/CV
Charge current	<7A	Use a constant current, constant voltage(CC/CV) lithium-ion (Li+) battery charge controller.
Inner resistance	≤150 mΩ	Between positive and negative polar of discharge port
Operation temperature range	Charge:	0℃~+45℃
	Discharge:	-20℃~+65℃
Storage temperature range	0℃~40℃ at half charged state	Recommended long-term storage temperature is 15~25℃
Storage environment humidity	RH: 65±20%	
Environment humidity	≤85%RH	
Shell material	PVC	

4. PCM Electrical Characteristics (Ta=25℃)

NO.	Item		Standard
1	Voltage	Charge mode	CC/CV
		Single cell Charge balance Voltage	3.6V
2	Current	Single cell balance current	70mA
		Self-discharge current	≤20uA
		Max continuous charge current/discharge current	7A/15A
3	Over charge protection	Over charge protection voltage	3.90±0.05V
		Over charge protection delay time	0.9-1.5S
		Over charge release voltage	3.80±0.05V
4	Over discharge protection	Over discharge protection voltage	2.00±0.08V
		Over discharge protection delay	100-200mS
		Over discharge release voltage	2.50±0.10V
5	Over current protection	Over current protection current	55±5A
		Over current protection delay	10±5ms
		Over current release	Cut off load

6	Short circuit protection	Condition	Outside short circuit
		Short circuit protection delay time	<600us
		Release condition	Cut off Loading, release automatically
7	Inner resistance	(MOSFET) Protection circuit (MOSFET)	$\leq 20\text{m}\Omega$
8	Temperature	Working temperature range	$-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$
		Storage temperature range	$-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
		Temperature protection	$65 \pm 5^{\circ}\text{C}$

5.Appearance And Delivery Condition

There shall be no such defects as scratch, discoloration, leakage which may adversely affect commercial value of the cell. About 80%~90% charged (after discharged, use the charger to charge about 4~5 hours).

6. Standard Test Conditions

6.1 Environmental Conditions

Unless otherwise specified, all tests stated in this specification are conducted at temperature $25 \pm 2^{\circ}\text{C}$ and humidity $65 \pm 20\%$, air pressure $86\text{kPa} \sim 106\text{kPa}$.

6.2 Measuring Equipment

- a) Voltage is measured by D.C. voltmeter which precision is higher than 0.5 grade and self resistance is higher than $1\text{k}\Omega/\text{V}$;
- b) Current is measured by D.C. meter which precision is higher than 0.5 grade;
- c) Temperature is measured by thermometer which has proper measuring range and division value is lower than 0.5°C ;
- d) The timer used in measuring should be degressed in hour, minute and second, and should have degree of accuracy no more than $\pm 1\%$.

6.3 Test conditions

The cells to be tested should be new cells and within one month after shipment from our factory and the cells shall not be cycled over five times before the testing. All the tests in this specification shall be conducted

in an ambient temperature of $25^{\circ}\text{C} \pm 2^{\circ}\text{C}$ under a humidity of $65 \pm 20\%$, unless otherwise specified .

7. Characteristics

7.1 Standard charge

Charge the battery with DC stabilized power supply 58.4V, constant-current 0.2C(A) current until current reach to 0.02C (A) .

7.2 standard discharge


Discharge the battery at 0.2C to 40.0V or the protection circuit come to protection, stop.

7.3 Electrical Performance

Test Items	Test Methods	Test Standards
7.3.1 0.2C Discharging Performance	After standard charge, store the battery for 0.5 ~ 1hr under 6.1 specified conditions, then discharge at 0.2C to cut-off voltage.	$\geq 100\%$ Nominal capacity
7.3.2 High Temperature Performance	After standard charge, put the cells into $55^{\circ}\text{C} \pm 2^{\circ}\text{C}$ high temperature box with constant temperature for 2hrs, then discharging at 0.2C to cut-off voltage. Then take the cell out, stored for 2hrs under 6.1 specified conditions, check the exterior appearance.	$\geq 95\%$ Nominal capacity The battery no explosion, no fire
7.3.3 Charge Retention	After standard charge, store the cells for 28 days under 6.1 specified conditions, then discharge at 0.2C 5mA to cut-off voltage.	capacity retention rate $\geq 95\%$ of minimum capacity
7.3.4 Cycle Life	1) standard charge at 0.2C, 2) rest 0.5~1 hr 3) discharge at 0.2C to cut off voltage 4) rest 0.5~1hr repeat the above steps until 1500 cycles.	Capacity retention rate $\geq 80\%$

8. Characteristic curve

HT48V12.8AH Charge-Discharge Curve 0.3C, 25 °C

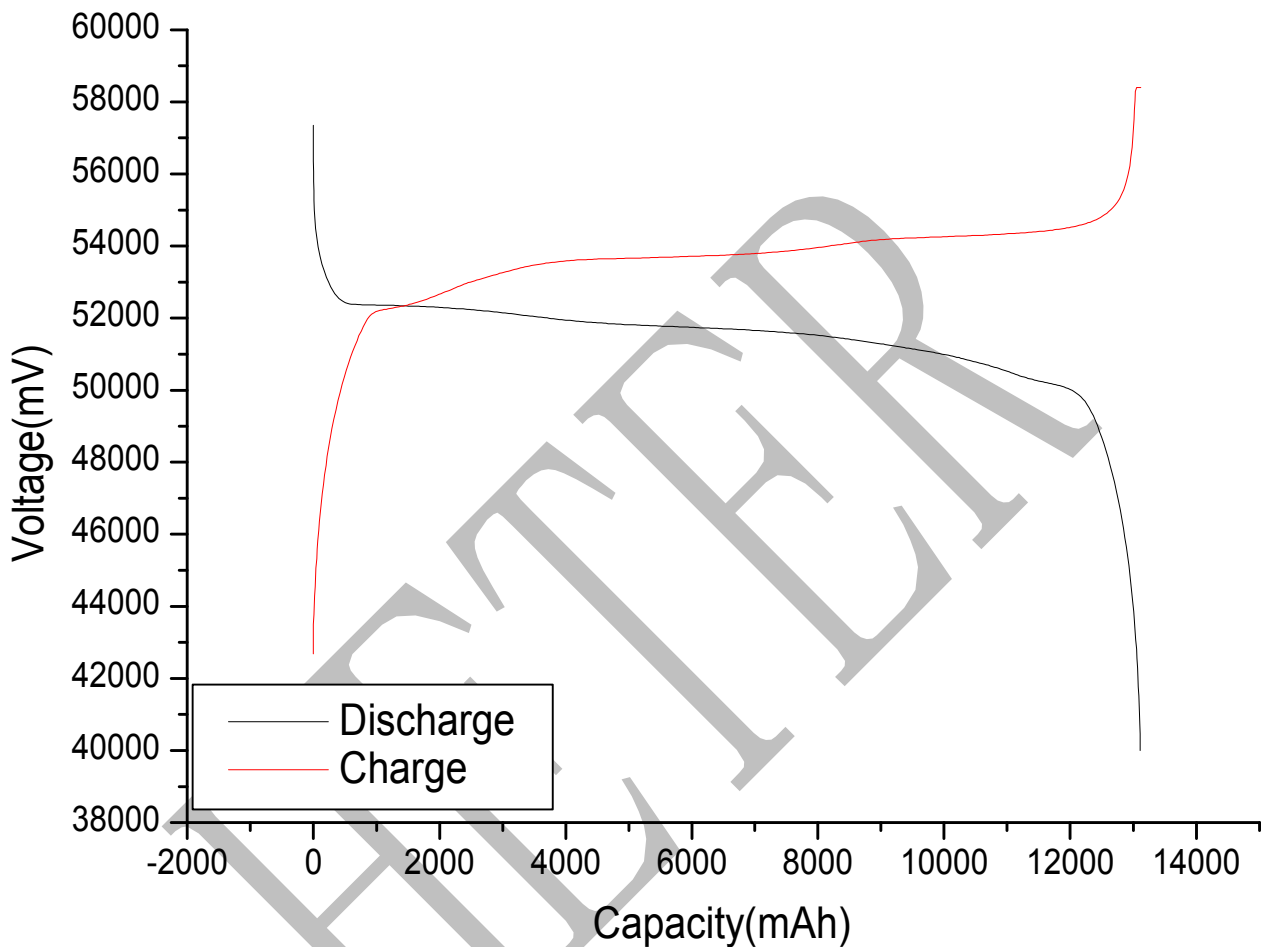

9. Cautions

9.1 Charging current should be less than maximum charge current specified in the Product Specification. Charging with higher current than recommended value may cause damage to cell electrical, mechanical and safety performance and could lead to heat generation or leakage.

9.2 The cell shall be discharged at less than the maximum discharge current specified in the Product Specification. High discharging current may reduce the discharging capacity significantly or cause over-heat.

9.3 It should be noted that the cell would be possible to be at a over-discharged state by its self-discharge characteristics in case the cell is not used for long time. In order to prevent over-discharging, the cell shall be charged periodically to maintain between 52.8V and 54.4V. Over-discharging may causes

loss of cell performance, characteristics, or battery functions.

9.4 The storage temperature and humidity of the battery are as below: -10℃~40℃ within one month , 0℃~35℃ within 2 months, 15℃~25℃ for 3 months and above 3 months .Humidity: 65±20%RH .

9.5 Prohibition of disassembly.

9.6 Do not expose the battery to extreme heat or flame.

9.7 Do not reverse the polarity of the battery pack for any reason.

9.8 Do not immerse the battery pack in water or sea water, or get it wet.

9.9 Use a constant current, constant voltage (CC/CV) lithium-ion (Li+) battery charge controller.

10.Warranty & Product Liability

Warranty period begins from the delivery date, and is exclusively continued 6 months.HETER is not responsible for the incident caused by not obeying the specifications.Before using the battery, you should read the specifications,usage instruction and some attentions carefully to learn its application method and areas. If the phenominon such as error using method or wrong circuit connection,or input power data,working index are inconsistent with the specifications happen and cause damage to production,circuit and its accesories, we are not responsible for it.

If you have any questions, please contact the following address:

Headquarter

Add: Thailand Industrial Park, Hi-tech District, Zaozhuang City, Shandong Province, China.

Toll-free phone: 400-812-5699

Fax: +86-632-5199218

Postcode: 277800

Web site: www.heter.biz

Branch office(Shenzhen)

Add:Room1809,WestTower,NanshanSoftwareParkBuilding,ShennanRoad,NanshanDistrict,Shen zhen.

Tel:+86-755-28895926

Fax:+86-755-28892486

Postcode: 518052